




TF3B- SERIES

Tomfau

三爪高速中空油壓夾頭(不包含連接板)

3-JAW HIGH SPEED WEDGE TYPE THROUGH HOLE POWER CHUCK
(without ADAPTOR)

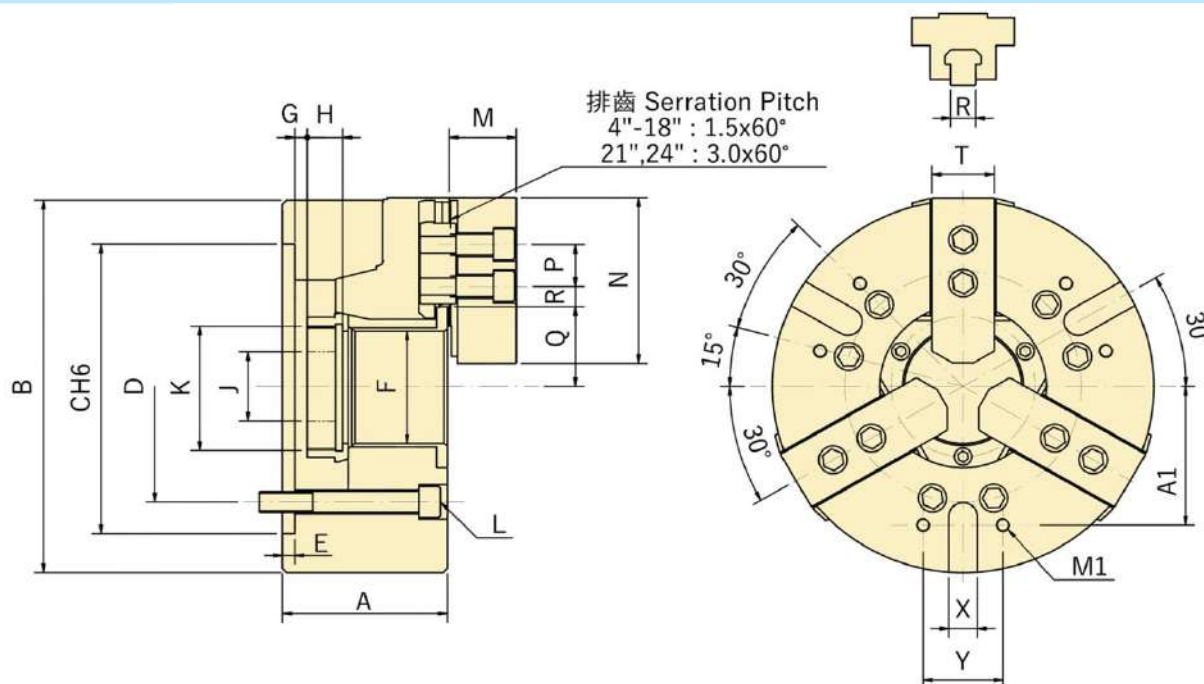

SPECIFICATION

MODEL	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	把握徑 Clamping Dia.		最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force kN(kgf)	把握力 Max. Clamping Force kN(kgf)	慣性矩 Moment of Inertia (kg-m ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	最高使用壓力 Max. Pressure of Hydraulic Cylinder (kgf/cm ²)
			Max. (mm)	Min. (mm)							
TF3B-4	5.4	10	110	5	8000	14 (1428)	28.5 (2906)	0.007	4	RC-4	24.5
TF3B-5	5.4	10	135	10	7000	17.5 (1784)	36 (3671)	0.018	6.7	RC-5	29.5
TF3B-6	5.5	12	165	10	6000	22 (2243)	57 (5812)	0.057	12.5	RC-6	28.5
TF3B-8	7.4	16	210	12	4900	34 (3467)	86 (8769)	0.167	22.6	RC-8	27
TF3B-10	8.8	19	254	16	4200	43 (4385)	111 (11319)	0.315	37	RC-10	27.5
TF3B-12	10.6	23	304	38	3300	55 (5608)	144 (14686)	0.737	61	RC-12	27.5
TF3B-15	10.6	23	381	40	2600	71 (7240)	180 (18355)	2.273	120	RC-15	27.5
TF3B-18	10.6	23	450	40	2000	71 (7240)	180 (18355)	4.776	166	RC-15	23.5
TF3B-21	13	28	530	50	1700	90 (9177)	234 (23861)	9.25	229	RC-2816	33
TF3B-24	13	28	610	50	1400	90 (9177)	234 (23861)	16.85	287	RC-2816	33

DIMENSION

MODEL	A	B	CH6	D	E	F	G		H	J	KMax	L	M	N	P	Q		R		T	X	Y	A1	M1
							Max.	min.								Max.	min.	Max.	min.					
TF3B-4	59	110	85	70.6	4	26	3.5	-6.5	17.5	12	M32x1.5	3-M10x60	24	49.5	14	23	20.3	11.25	6.75	23	-	-	-	-
TF3B-5	60	135	110	82.55	4	33	1	-9	20	25	M40x1.5	3-M10x60	26	54	14	26.5	23.8	19.75	7.75	23	12	30	52	2-M6
TF3B-6	81	169	140	104.78	5	45	11	-1	19	35	M55x2	6-M10x80	29	66	20	32	29.25	22.75	9.25	32	16	36	65	2-M8
TF3B-8	91	210	170	133.35	5	52	14.5	-1.5	20.5	40	M60x2	6-M12x90	39	95	25	38.7	35	29.75	14.75	35	16	45	80	2-M8
TF3B-10	100	254	220	171.45	5	75	8.5	-10.5	25	50	M85x2	6-M16x100	43	110	30	51	46.6	33.75	14.25	40	16	60	102	2-M10
TF3B-12	110	304	220	171.45	6	91	8	-15	28	50	M100x2	6-M16x110	51	130	30	61.3	56	45.75	15.75	50	20	60	102	2-M10
TF3B-15	133	381	300	235	6	117.5	12	-11	39	50	M130x2	6-M20x150	66	165	43	70	64.7	54.75	20.25	50	20	80	150	2-M12
TF3B-18	133	450	300	235	6	117.5	12	-11	39	50	M130x2	6-M20x150	66	165	43	82	76.7	78.25	18.25	50	20	80	150	2-M12
TF3B-21	148	530	380	330.2	6	170	16	-12	40	50	M180x3	6-M24x140	74	185	60	108	101.5	117.5	21.5	62	20	100	200	2-M12
TF3B-24	148	610	380	330.2	6	170	16	-12	40	50	M180x3	6-M24x140	74	185	60	108	101.5	117.5	21.5	62	20	100	200	2-M12