




VT- SERIES

Tomfau

兩爪中實油壓夾頭(不含連接板)

2-JAW WEDGE TYPE NON THROUGH HOLE POWER CHUCK
(without ADAPTOR)

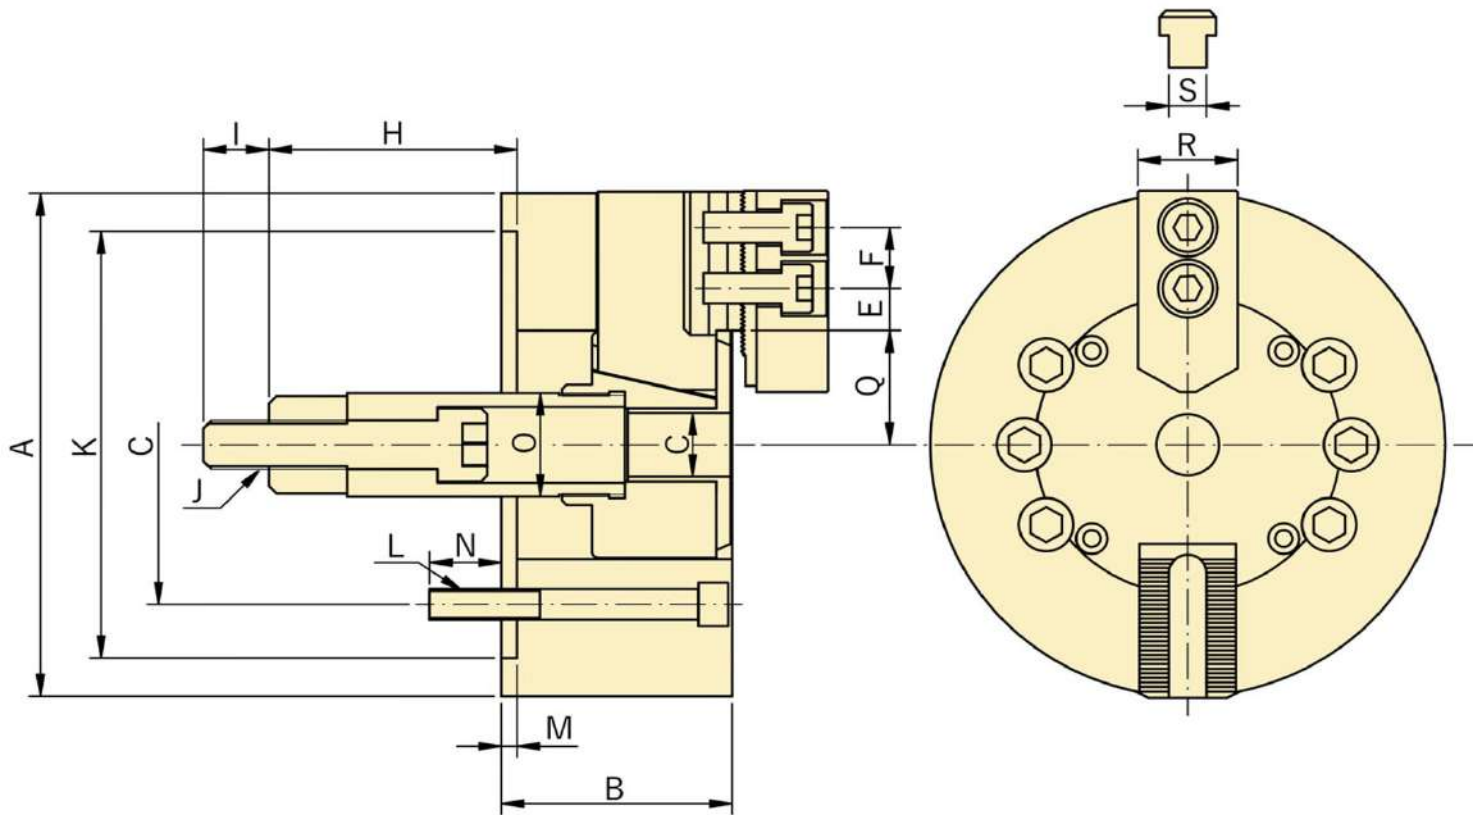

SPECIFICATION												
MODEL	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	把握徑 Clamping Dia. Max. (mm) Min. (mm)		最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force kN	把握力 Max. Clamping Force kN	慣性矩 Moment of Inertia (kg·m ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	搭配硬爪 Matching Hard Jaw	搭配生爪 Matching Soft Jaw
VT-206	8.5	20	165	12	5100	1230	3500	0.04	12	MH-105	HJ-06	HC-06
VT-208	8.8	21	210	12	4650	1700	5100	0.13	22	MH-125	HJ-08	HC-08
VT-210	8.8	25	254	16	3810	2000	7250	0.29	33	MH-125	HJ-10	HC-10
VT-212	10.5	30	304	18	3200	2800	10500	0.7	57.3	MH-150	HJ-12-1	HC-12-1
VT-215	16	35	381	68	2800	5600	17000	1.7	96	MH-200	HJ-15-1	HC-15-1

DIMENSION																				
MODEL	A	B	C	E		F	H		I	J	K H6	L	M	N	O	P	Q		R	S
				Max.	Min.		Max.	Min.									Max.	Min.		
VT-206	165	74	104.78	18	7.5	20	89.6	69.6	36	M16x2.0	140	6-M10	5	14	34	21	37.8	33.5	31	12
VT-208	210	85	133.35	22.5	9	25	109	88	36	M20x2.5	170	6-M12	5	20	38	25	46.3	41.9	35	14
VT-210	254	89	171.45	37.5	10.5	30	140	115	36	M20x2.5	220	6-M16	5	18	45	34	51.1	46.7	40	16
VT-212	304	106	171.45	47	11	30	145	115	36	M20x2.5	220	6-M16	6	22	50	34	61	55.75	50	18
VT-215	381	114	235	50.25	23.25	43	71	36	55	M30x3.5	300	6-M20	6	29	60	-	77.5	69.5	50	25.5