




V- SERIES

Tomfau

三爪中實油壓夾頭(不含連接板)

3-JAW WEDGE TYPE NON THROUGH HOLE POWER CHUCK
(without ADAPTOR)

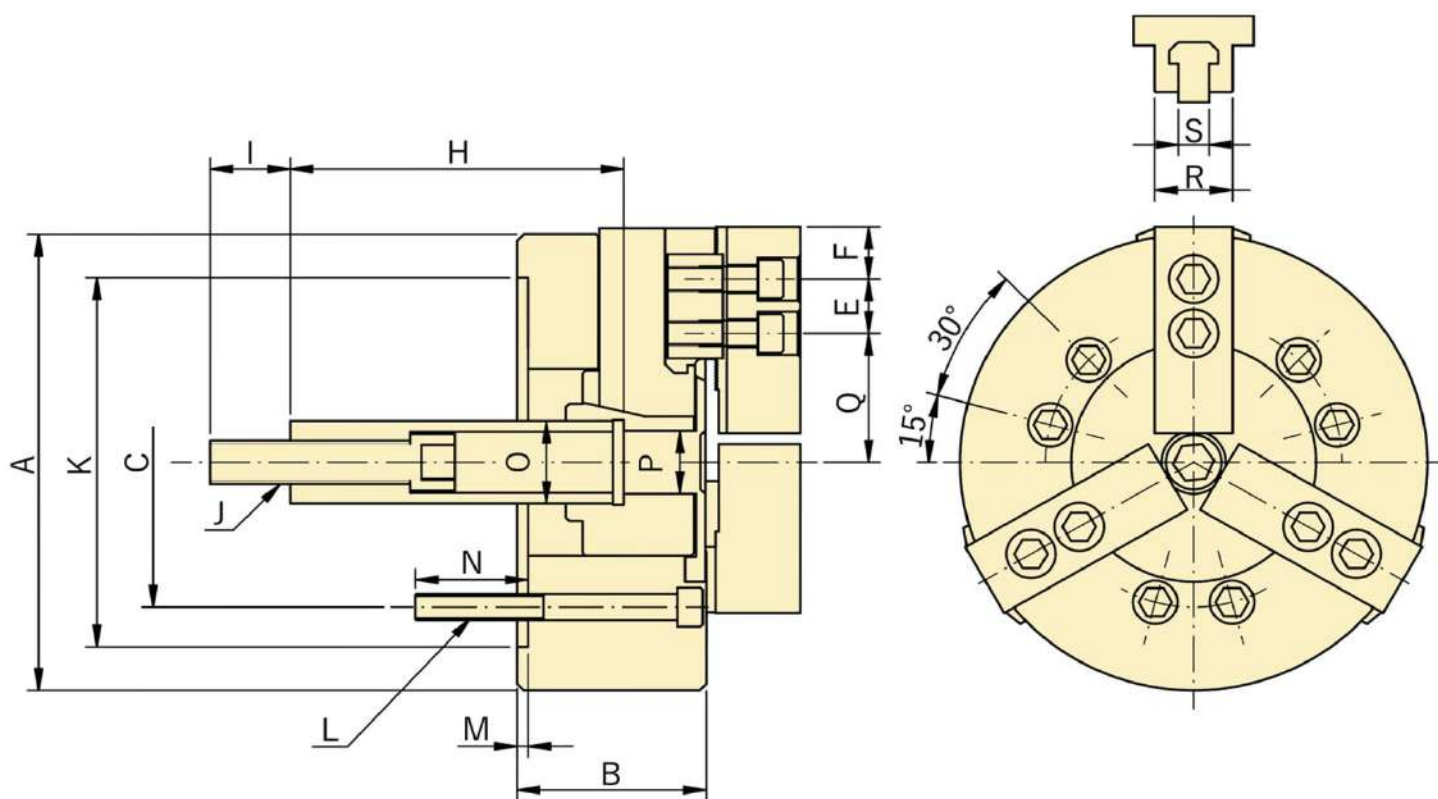

SPECIFICATION

MODEL	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	把握徑 Clamping Dia. Max. (mm) Min. (mm)	最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force (kgf)	把握力 Max. Clamping Force (kgf) / (kgf/cm ²)	慣性矩 Moment of Inertia (kg·m ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	搭配硬爪 Matching Hard Jaw	搭配生爪 Matching Soft Jaw
V-206	8.5	20	165 12	5000	1835	5253 / 25.5	0.045	12	MH-105	HJ-06	HC-06
V-208	8.8	21	210 12	4000	2549	7548 / 24.5	0.137	22.8	MH-125	HJ-08	HC-08
V-210	8.8	25	254 16	3500	2957	11013 / 28.6	0.3	34.4	MH-125	HJ-10	HC-10
V-212	10.5	30	304 18	3000	4181	15807 / 27.5	0.725	59	MH-150	HJ-12-1	HC-12-1
V-215	16	35	381 68	2800	8362	25391 / 32.6	1.8	100.6	MH-200	HJ-15-1	HC-15-1
V-218	16	35	450 40	2700	8362	25391 / 32.6	2.35	126	MS-200	HJ-15-1	HC-15-1
V-221	16	35	530 50	1900	8362	25391 / 32.6	4.8	187	MS-200	HJ-21-1	HC-21-1
V-224	16	35	610 50	1750	8362	25391 / 32.6	6.92	225	MS-200	HJ-21-1	HC-21-1

DIMENSION

MODEL	A	B	KH6	M	C	P	L	N	F	Q		E		H		S	R	J	O	I
										Max.	Min.	Max.	Min.	Max.	Min.					
V-206	165	74	140	5	104.78	21	6-M10	14	20	37.8	33.55	18	7.5	104.6	84.6	12	31	M16x2.0	34	36
V-208	210	85	170	5	133.35	25	6-M12	20	25	46.3	41.9	22.5	9	132	111	14	35	M20x2.5	38	36
V-210	254	89	220	5	171.45	34	6-M16	18	30	51.1	46.7	37.5	10.5	158	133	16	40	M20x2.5	45	36
V-212	304	106	220	6	171.45	34	6-M16	22	30	61	55.75	47	11	163	133	18	50	M20x2.5	50	36
V-215	382	114	300	6	235	-	6-M20	29	43	77.5	69.5	50.25	23.25	104	69	25.5	50	M30x3.5	60	55
V-218	450	114	300	6	235	-	6-M20	29	43	108	100	93	24	92	57	25.5	50	M30x3.5	60	55
V-221	530	125	380	6	330.2	-	6-M24	31	60	86.5	78.5	93	24	97	62	25	65	M30x3.5	60	55
V-224	610	125	380	6	330.2	-	6-M24	31	60	125	117	93	24	97	62	25	65	M30x3.5	60	55