




TP10-115A8

氣壓夾頭

PNEUMATIC POWER CHUCK

Tomfau

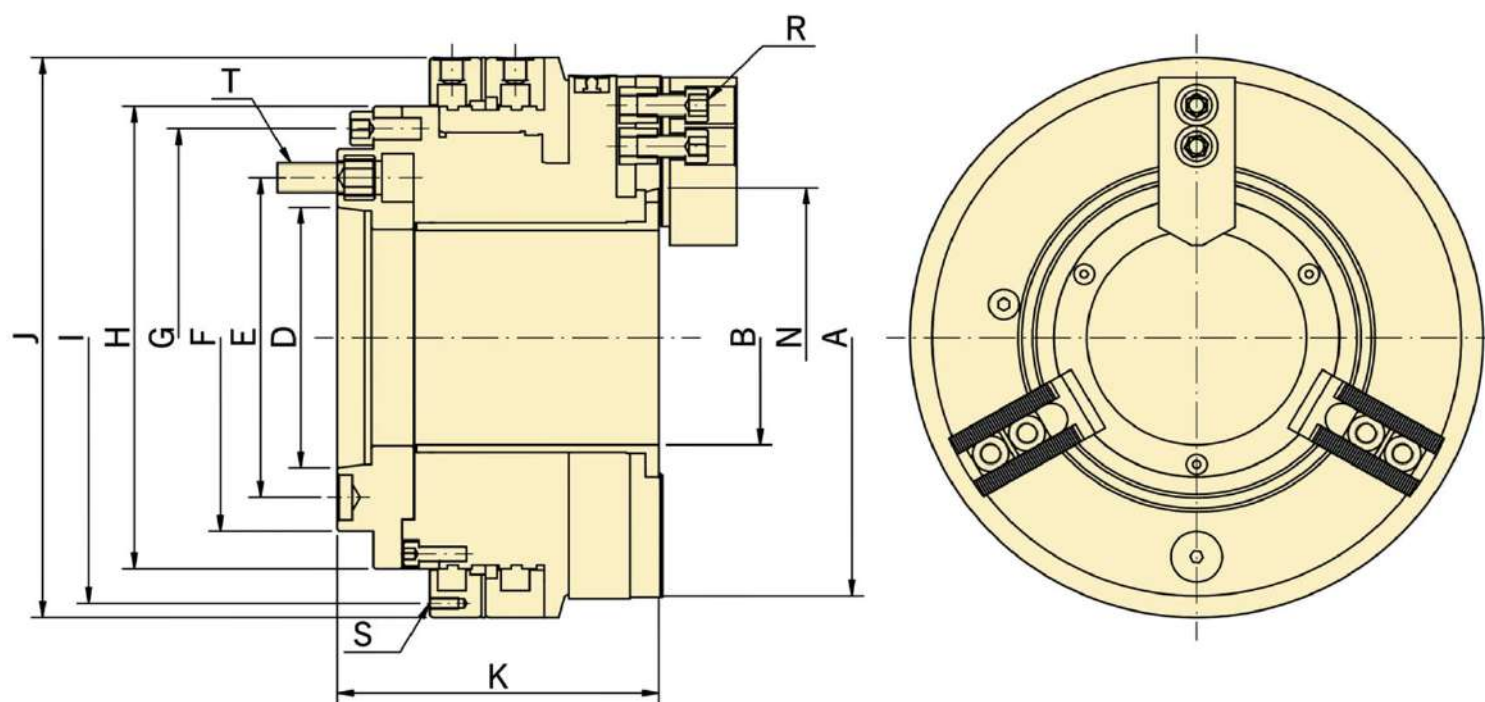

SPECIFICATION

通孔徑 Through Hole Dia. (mm)	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	最高轉數 Max. Rotation Speed (r.p.m.)	最高使用壓力 Max. Pressure of Hydraulic Cylinder (bar)		活塞面積 Effective Piston Area (cm ²)	夾持力 (6bar時) Clamping Force (at 6 bar) (kN)	使用空氣容積 (6bar時) Working Air Volume (at 6 bar) (L)	重量 Weight (KG)	慣性矩 Moment of Inertia (kg·m ²)
			min	Max					
115	8.3	2800	3	9	232.6	3.6	5.7	39.5	0.458

DIMENSION

A	N	B	D	E	T	F	G	H	I	J	K	S	R
277	160.5	115	139.719	171.45	M16	210	224	248	285	300	168.5	M6	M12