




TF2BA- SERIES

Tomfau

兩爪高速中空油壓夾頭(包含連接板)

2-JAW HIGH SPEED WEDGE TYPE THROUGH HOLE POWER CHUCK
(with ADAPTOR)

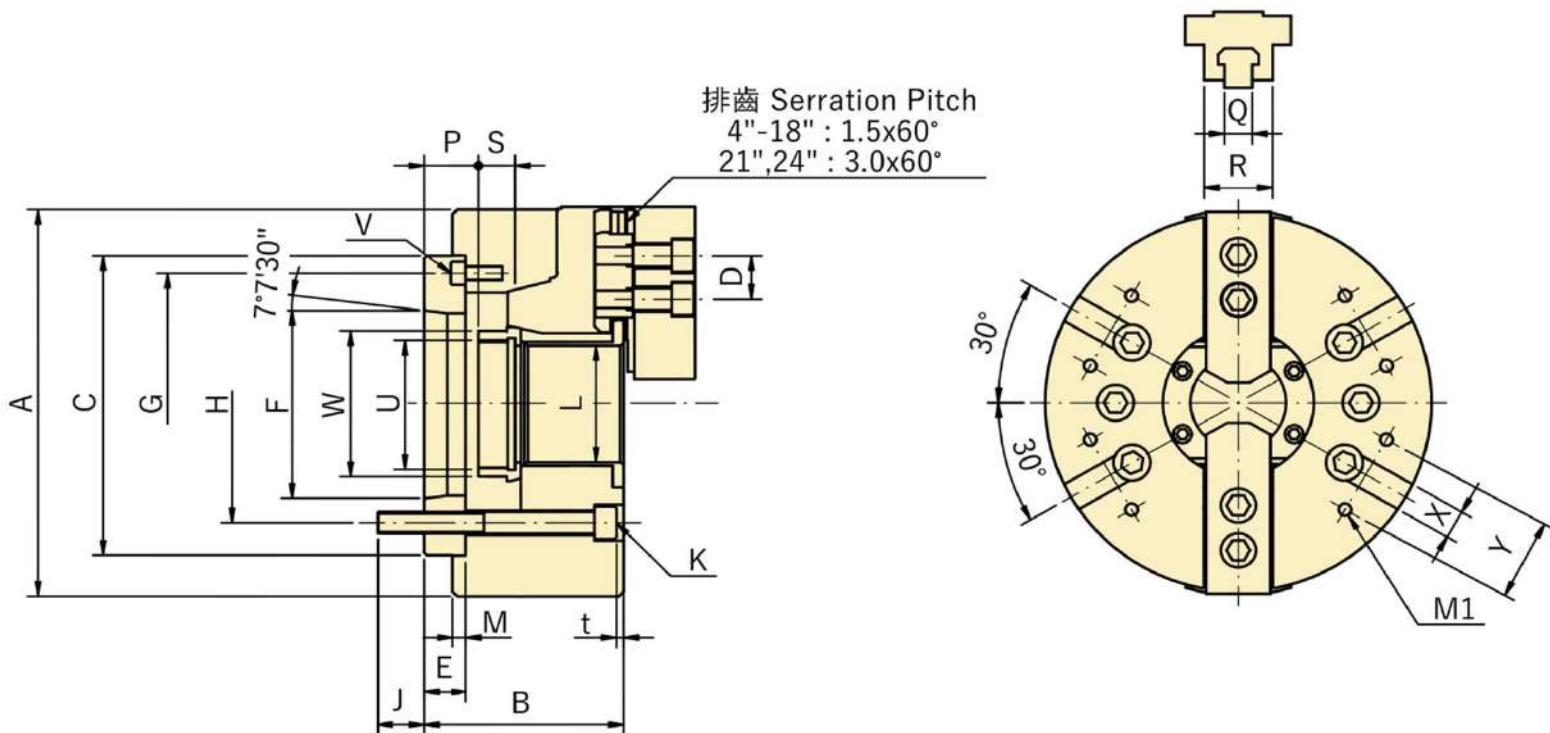

SPECIFICATION

MODEL	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	把握徑 Clamping Dia. Max. Min. (mm) (mm)	最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force (Kgf)	把握力 Max. Clamping Force (Kgf)	慣性矩 Moment of Inertia (kg·m ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	最高使用壓力 Max. Pressure of Hydraulic Cylinder (kgf/cm ²)
TF2B-4	5.4	10	110 10	8000	948	1935	0.006	3.8	RC-4	23
TF2B-5A4	5.4	10	135 10	7000	1158	2399	0.017	6.7	RC-5	16
TF2B-6A5	5.5	12	165 10	6000	1450	3800	0.056	14	RC-6	19
TF2B-8A6	7.4	16	210 12	4900	2250	5600	0.165	23.5	RC-8	17.5
TF2B-10A8	8.8	19	210 16	4200	2850	7400	0.308	36.8	RC-10	18.5
TF2B-12A8	10.6	23	304 38	3300	3667	9600	0.7	58.7	RC-12	18.5
TF2B-15A11	10.6	23	381 40	2500	4793	12236	2.3	125	RC-15	15.3

DIMENSION

MODEL	A	B	G H6	D	E	F	C H6	H	J	K	L	M	P Max. Min.		R	S	T	U MAX	V	W	X	Y	A1	M1	t
TF2B-4	110	59	-	14	-	-	85	70.6	16	4xM10	26	4	3.5	-6.5	23	17.5	23	M32x1.5	-	38	-	-	-	-	-
TF2B-5A4	135	71	96	14	15	63.513	110	82.55	15.5	4xM10	33	4	16	6	10	20	23	M40x1.5	3xM6	45	12	30	52	M6	5
TF2B-6A5	169	91	116	20	15	82.563	140	104.78	16	6xM10	45	5	26	14	12	19	32	M55x2.0	3xM6	60	16	36	65	M8	5
TF2B-8A6	210	103	150	25	17	106.375	170	133.35	19	6xM12	52	5	31.5	15.5	14	20.5	37	M60x2.0	3xM6	66	16	45	80	M8	5
TF2B-10A8	254	113	190	30	18	139.719	220	171.45	24	6xM16	75	5	26.5	7.5	16	25	42	M85x2.0	6xM8	94	16	60	102	M10	5
TF2B-12A8	304	122	190	30	18	139.719	220	171.45	25	6xM16	91	6	26	3	21	28	52	M100x2.0	6xM8	108	20	60	100	M10	5
TF2B-15A11	381	149	260	43	22	196.869	300	235	28	6xM20	117.5	6	34	11	24	39	62	M130x2.0	3xM10	139	20	80	150	M12	5