




TF2CA-/TF2XA- SERIES

兩爪高速中空油壓夾頭(大孔徑)(包含連接板)

2-JAW HIGH SPEED WEDGE TYPE THROUGH HOLE POWER CHUCK
(with ADAPTOR) (BIG BORE)

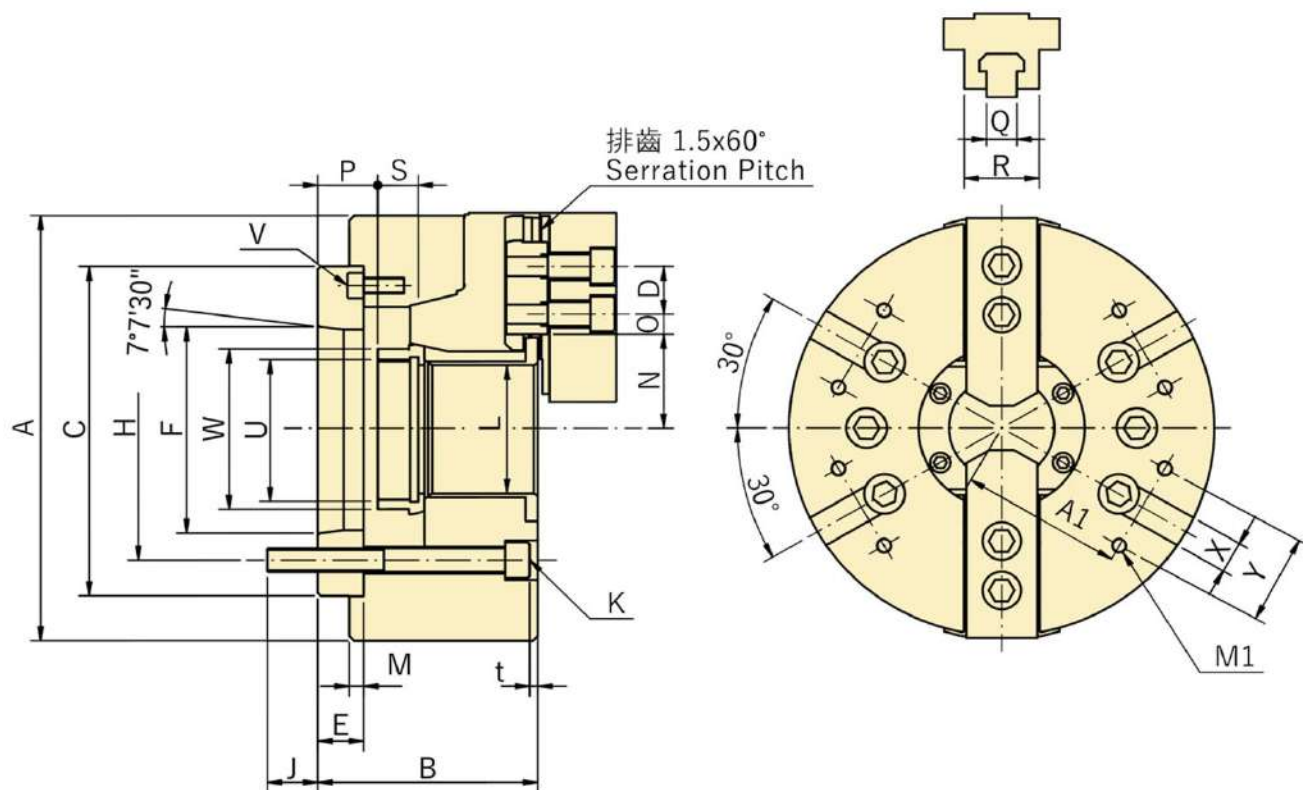

SPECIFICATION

MODEL	通孔徑 Through Hole Dia. (mm)	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force (kgf)	把握力 Max. Clamping Force (kgf)	最高使用壓力 Max. Pressure of Hydraulic Cylinder (kgf/cm ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	搭配生爪 Matching Soft Jaw	搭配硬爪 Matching Hard Jaw
TF2C-6A5	52	5.5	12	6000	1500	3900	18	13.2	RC-6	HC06	HJ06
TF2C-8A6	66	7.4	17	4600	2400	6000	18	23.1	RC-8	HC08	HJ08
TF2X-10A8	78	8.8	19	4200	3000	7500	18.5	36.2	RC-10	HC10	HJ10

DIMENSION

MODEL	A	B	C H 6	D	E	F	H	J	K	L	M	N		O		P		R	S	T	U MAX	V	W	X	Y	A1	M1	t
												Max.	min.	Max.	min.	Max.	min.											
TF2C-6A5	175	75	140	20	30	82.563	104.78	16	6-M10	52	5	32	29.25	24	7.5	25	12.5	12	19	32	M60x2	-	66	16	36	65	M8	5
TF2C-8A6	215	108.5	170	25	22.5	106.36	133.4	16	6-M12	66	7	46	42	25.5	10.5	12.5	-4.5	14	25	37	M74x2	-	82	16	45	80	M8	5
TF2X-10A8	254	113	220	30	18	139.719	171.45	20	6-M16	78	5	51	46.6	34.5	12	26.5	7.5	16	25	42	M87x2	-	96	16	60	102	M10	5