




RM-06

Tomfau

超薄副軸中空迴轉油壓缸

**SUPER COMPACT SUB-SPINDLE HIGH SPEED HOLLOW
ROTARY HYDRAULIC CYLINDER**

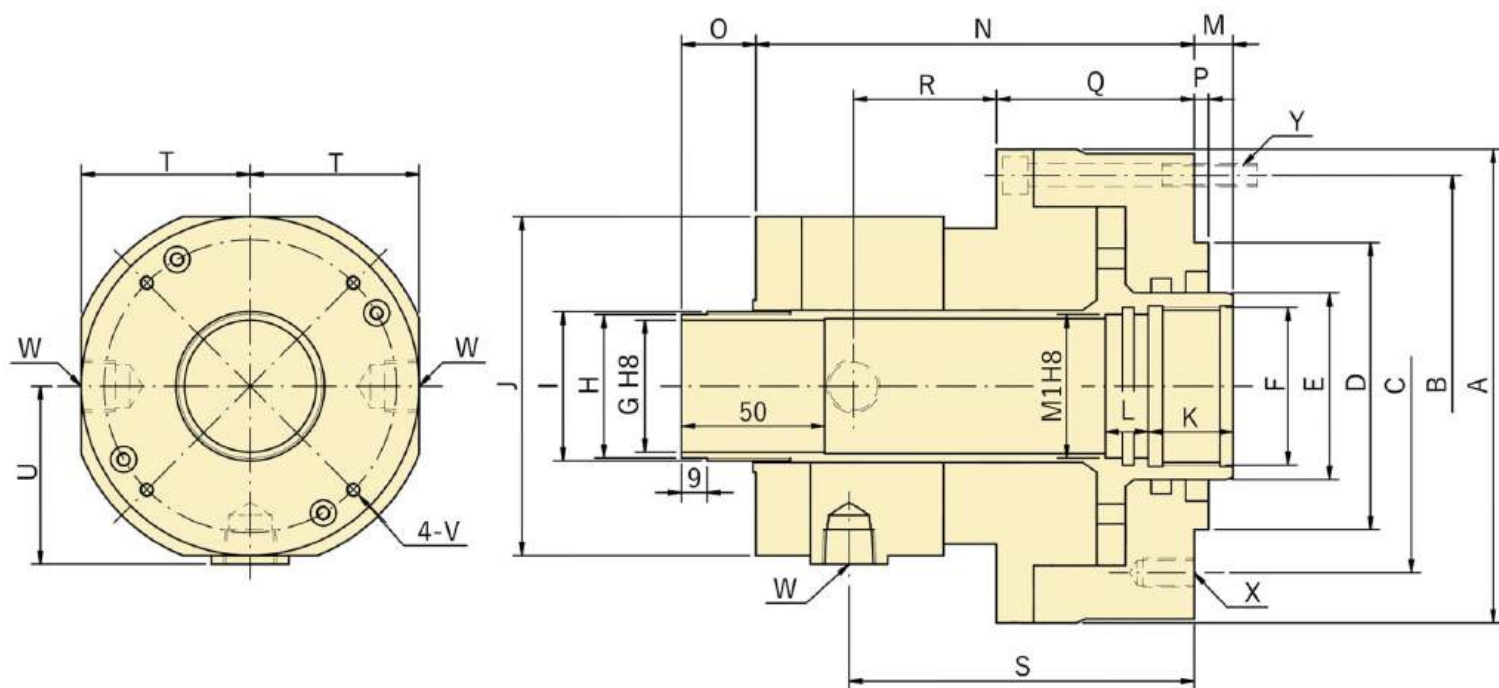

SPECIFICATION

MODEL	活塞面積 Effective Piston Area (cm ²)		活塞行程 Piston Stroke (mm)	最高使用迴轉速 Max. Speed (r.p.m)	最高使用壓力 Max. Pressure MPa (kgf/cm ²)	慣性矩 Moment of Inertia (kgf·m ²)	重量 Weight (kg)	回油量 (含內部排油量) Max. oil leakage from drain port and max. internal oil leakage (lit / min)
	押側 Extend	引側 Retract						
RM-06	100.6	89.5	15	7000	4.0 (40.8)	0.019	8.5	3
RM-06S	100.6	89.5	15	7000	4.0 (40.8)	0.020	9.0	3

DIMENSION

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M1
RM-06	165	147	130	100	65	M55x2	46	50	M52x1.5	118	29.5	15	50
RM-06S	165	147	130	100	65	M50x1.5	43	50	M52x1.5	118	29.5	15	50

DIMENSION

MODEL	M		N	O		P	Q	R	S	T	U	V	W
	Max.	min.		Max.	min.								
RM-06	13.5	-1.5	153	26	41	5	69	50	120.5	59	62	4-M5x6	PT 3/8"
RM-06S	13.5	-1.5	153	26	41	5	69	50	120.5	59	62	4-M5x6	PT 3/8"