



VWA- SERIES

Tomfau

三爪中實油防水壓夾頭(包含連接板)

3-JAW WEDGE TYPE NON THROUGH HOLE

WATERPROOF POWER CHUCK(with ADAPTOR)

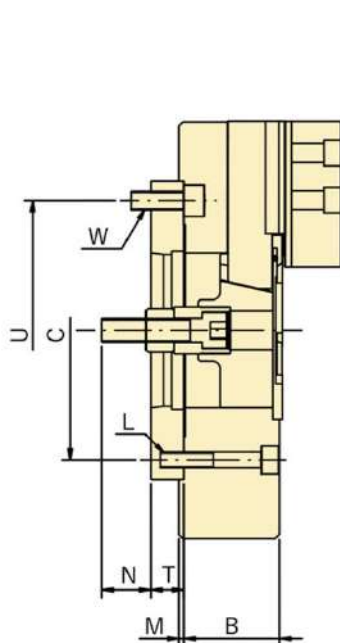


Fig. 2


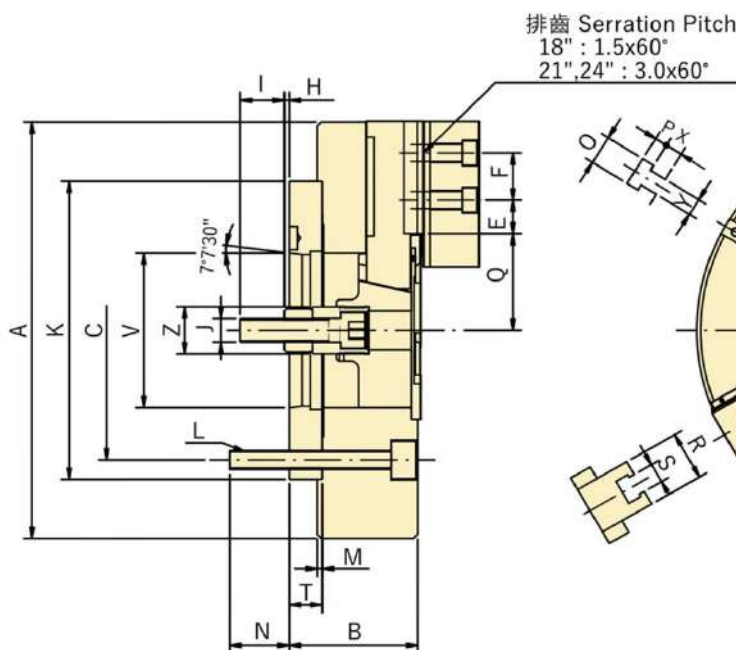


Fig. 1

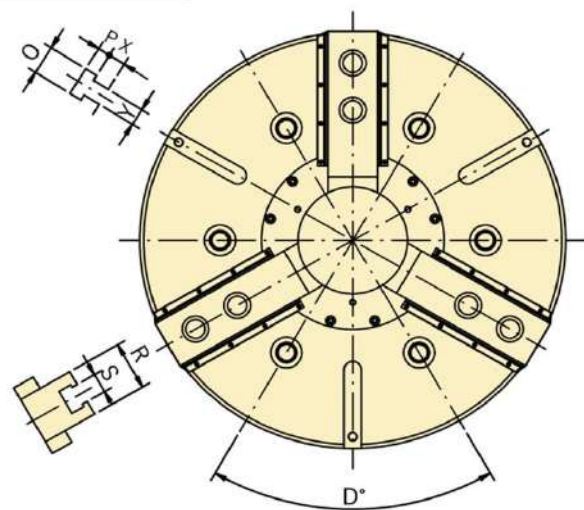

SPECIFICATION

MODEL	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	把握徑 Clamping Dia. Max. (mm) Min. (mm)	最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force (kgf)	把握力 Max. Clamping Force (kgf) / (kgf/cm ²)	慣性矩 Moment of Inertia (kg-m ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	搭配硬爪 Matching Hard Jaw	搭配生爪 Matching Soft Jaw
VW-218A8	16	35	450 40	2700	8362	25391 / 32.6	2.41	134	MS-200	HJ-15-1	HC-15-1
VW-218A11	16	35	450 40	2700	8362	25391 / 32.6	2.11	123	MS-200	HJ-15-1	HC-15-1
VW-221A11	16	35	530 50	1900	8362	25391 / 32.6	5.1	193	MS-200	HJ-21-1	HC-21-1
VW-221A15	16	35	530 50	1900	8362	25391 / 32.6	4.9	187	MS-200	HJ-21-1	HC-21-1
VW-224A11	16	35	610 50	1750	8362	25391 / 32.6	7.5	239	MS-200	HJ-21-1	HC-21-1
VW-224A15	16	35	610 50	1750	8362	25391 / 32.6	7.1	233	MS-200	HJ-21-1	HC-21-1

DIMENSION

MODEL	A	B	C	F	K	L	M	N	P	T	V	E		D	H		I	J	O	Q		R	S	Ref. Fig.
												Max.	Min.		Max.	Min.				Max.	Min.			
VW-218A8	450	141	171.45	43	300	6-M16	6	24	22	33	139.719	50.25	23.25	30°	71	36	55	M30x3.5	37	108	100	50	25.5	Fig. 2
VW-218A11	450	130	235	43	300	6-M20	6	22	22	22	196.869	50.25	23.25	30°	78	43	55	M30x3.5	37	108	100	50	25.5	Fig. 1
VW-221A11	530	146	330.2	60	380	6-M20	6	24	22	27	196.869	93.5	24.5	60°	56	21	55	M30x3.5	37	86	78	65	25	Fig. 2
VW-221A15	530	146	330.2	60	380	6-M24	6	34	22	27	285.75	93.5	24.5	60°	56	21	55	M30x3.5	37	86	78	65	25	Fig. 1
VW-224A11	610	146	235	60	380	6-M20	6	28	22	27	196.869	93.5	24.5	60°	56	21	55	M30x3.5	37	125	117	65	25	Fig. 2
VW-224A15	610	146	330.2	60	380	6-M24	6	34	22	27	285.75	93.5	24.5	60°	56	21	55	M30x3.5	37	125	117	65	25	Fig. 1