




TF3CA-/TF3XA- SERIES

三爪高速中空油壓夾頭(大孔徑)(包含連接板)

3-JAW HIGH SPEED WEDGE TYPE THROUGH HOLE POWER CHUCK
(with ADAPTOR) (BIG BORE)

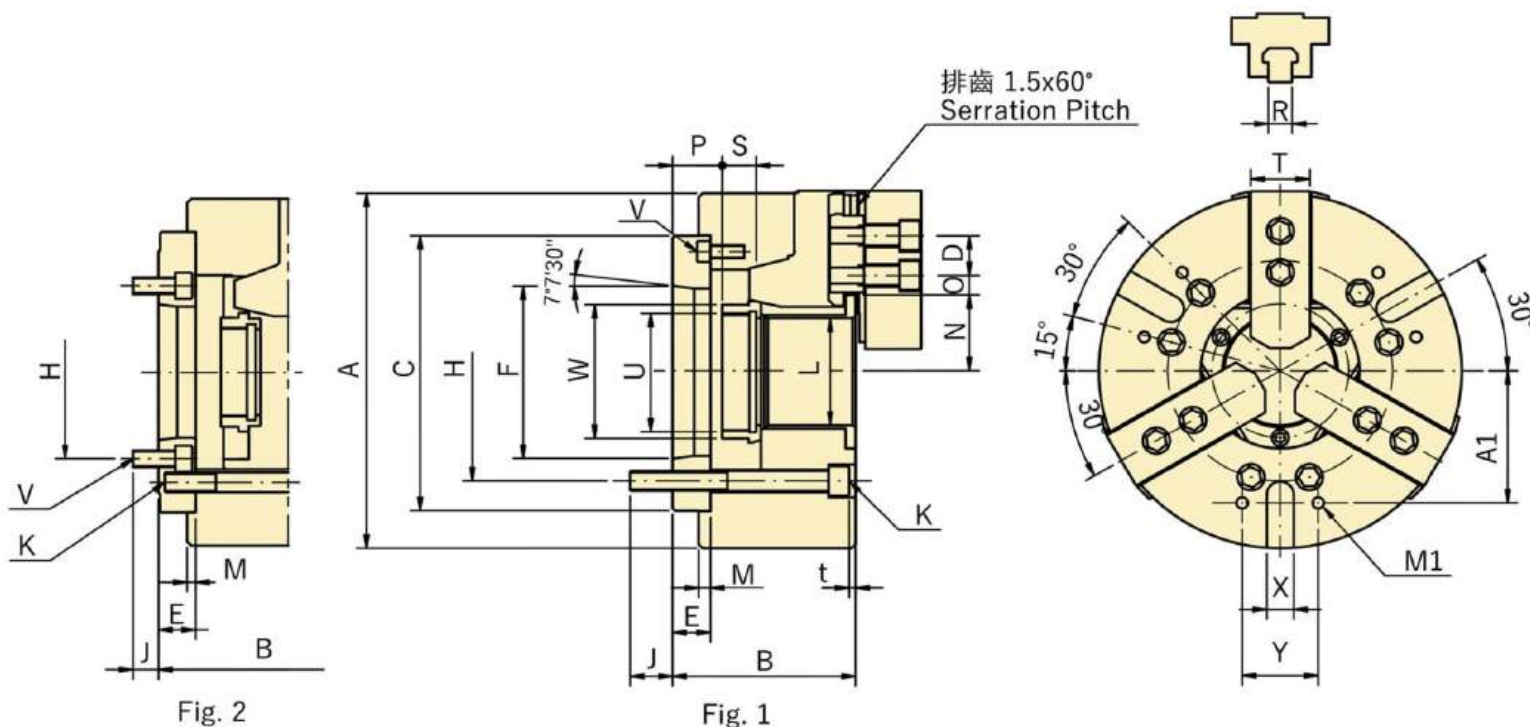

SPECIFICATION

MODEL	通孔徑 Through Hole Dia. (mm)	爪行程 (直徑) Jaw Stroke (Dia.) (mm)	柱塞行程 Plunger Stroke (mm)	最高轉數 Max. Rotation Speed (r.p.m.)	最大拉桿推力 Max. Draw Bar Pull Force (kgf)	把握力 Max. Clamping Force (kgf)	最高使用壓力 Max. Pressure of Hydraulic Cylinder (kgf/cm ²)	重量 Weight (KG)	搭配油壓缸 Matching Hydraulic Cylinder	搭配生爪 Matching Soft Jaw	搭配硬爪 Matching Hard Jaw
TF3C-6A5	52	5.5	12	6000	2200	5700	18	14.2	RC-6	HC06	HJ06
TF3C-8A6	66	7.4	17	5000	3400	8700	18	24.5	RC-8	HC08	HJ08
TF3X-10A8	78	8.8	19	4200	4300	11000	27.5	37.4	RC-10	HC10	HJ10
TF3X-12A8	110	10.6	23	3300	5500	14300	19.5	61	RC-12	HC12	HJ12
TF3X-12A11	110	10.6	23	3300	5500	14300	19.5	61	RC-12	HC12	HJ12

DIMENSION

DIM.	A	B	C	H ₆	D	E	F	H	J	K	L	M	N		O		P		R	S	T	U _{MAX}	V	W	X	Y	A1	M1	t	Ref.
													Max.	min.	Max.	min.	Max.	min.												
TF3C-6A5	175	75	140	20	30	82.563	104.78	16	6-M10	52	5	32	29.25	24	7.5	25	12.5	12	19	32	M60x2	-	66	16	36	65	M8	5	Fig.1	
TF3C-8A6	215	108.5	170	25	22.5	106.36	133.4	16	6-M12	66	7	46	42	25.5	10.5	12.5	-4.5	14	25	37	M74x2	-	82	16	45	80	M8	5	Fig.1	
TF3X-10A8	254	113	220	30	18	139.719	171.45	20	6-M16	78	5	51	46.6	34.5	12	26.5	7.5	16	25	42	M87x2	-	96	16	60	102	M10	5	Fig.1	
TF3X-12A8	318	137	300	30	33	139.719	171.45	20	6-M20	110	6	68	63	53.5	19	37	14	21	28	52	M115x2	6-M6	127	20	60	140	M10	5	Fig.2	
TF3X-12A11	318	126	300	30	22	196.8	235	20	6-M20	110	6	68	63	53.5	19	26	3	21	28	52	M115x2	-	127	20	60	140	M10	5	Fig.1	